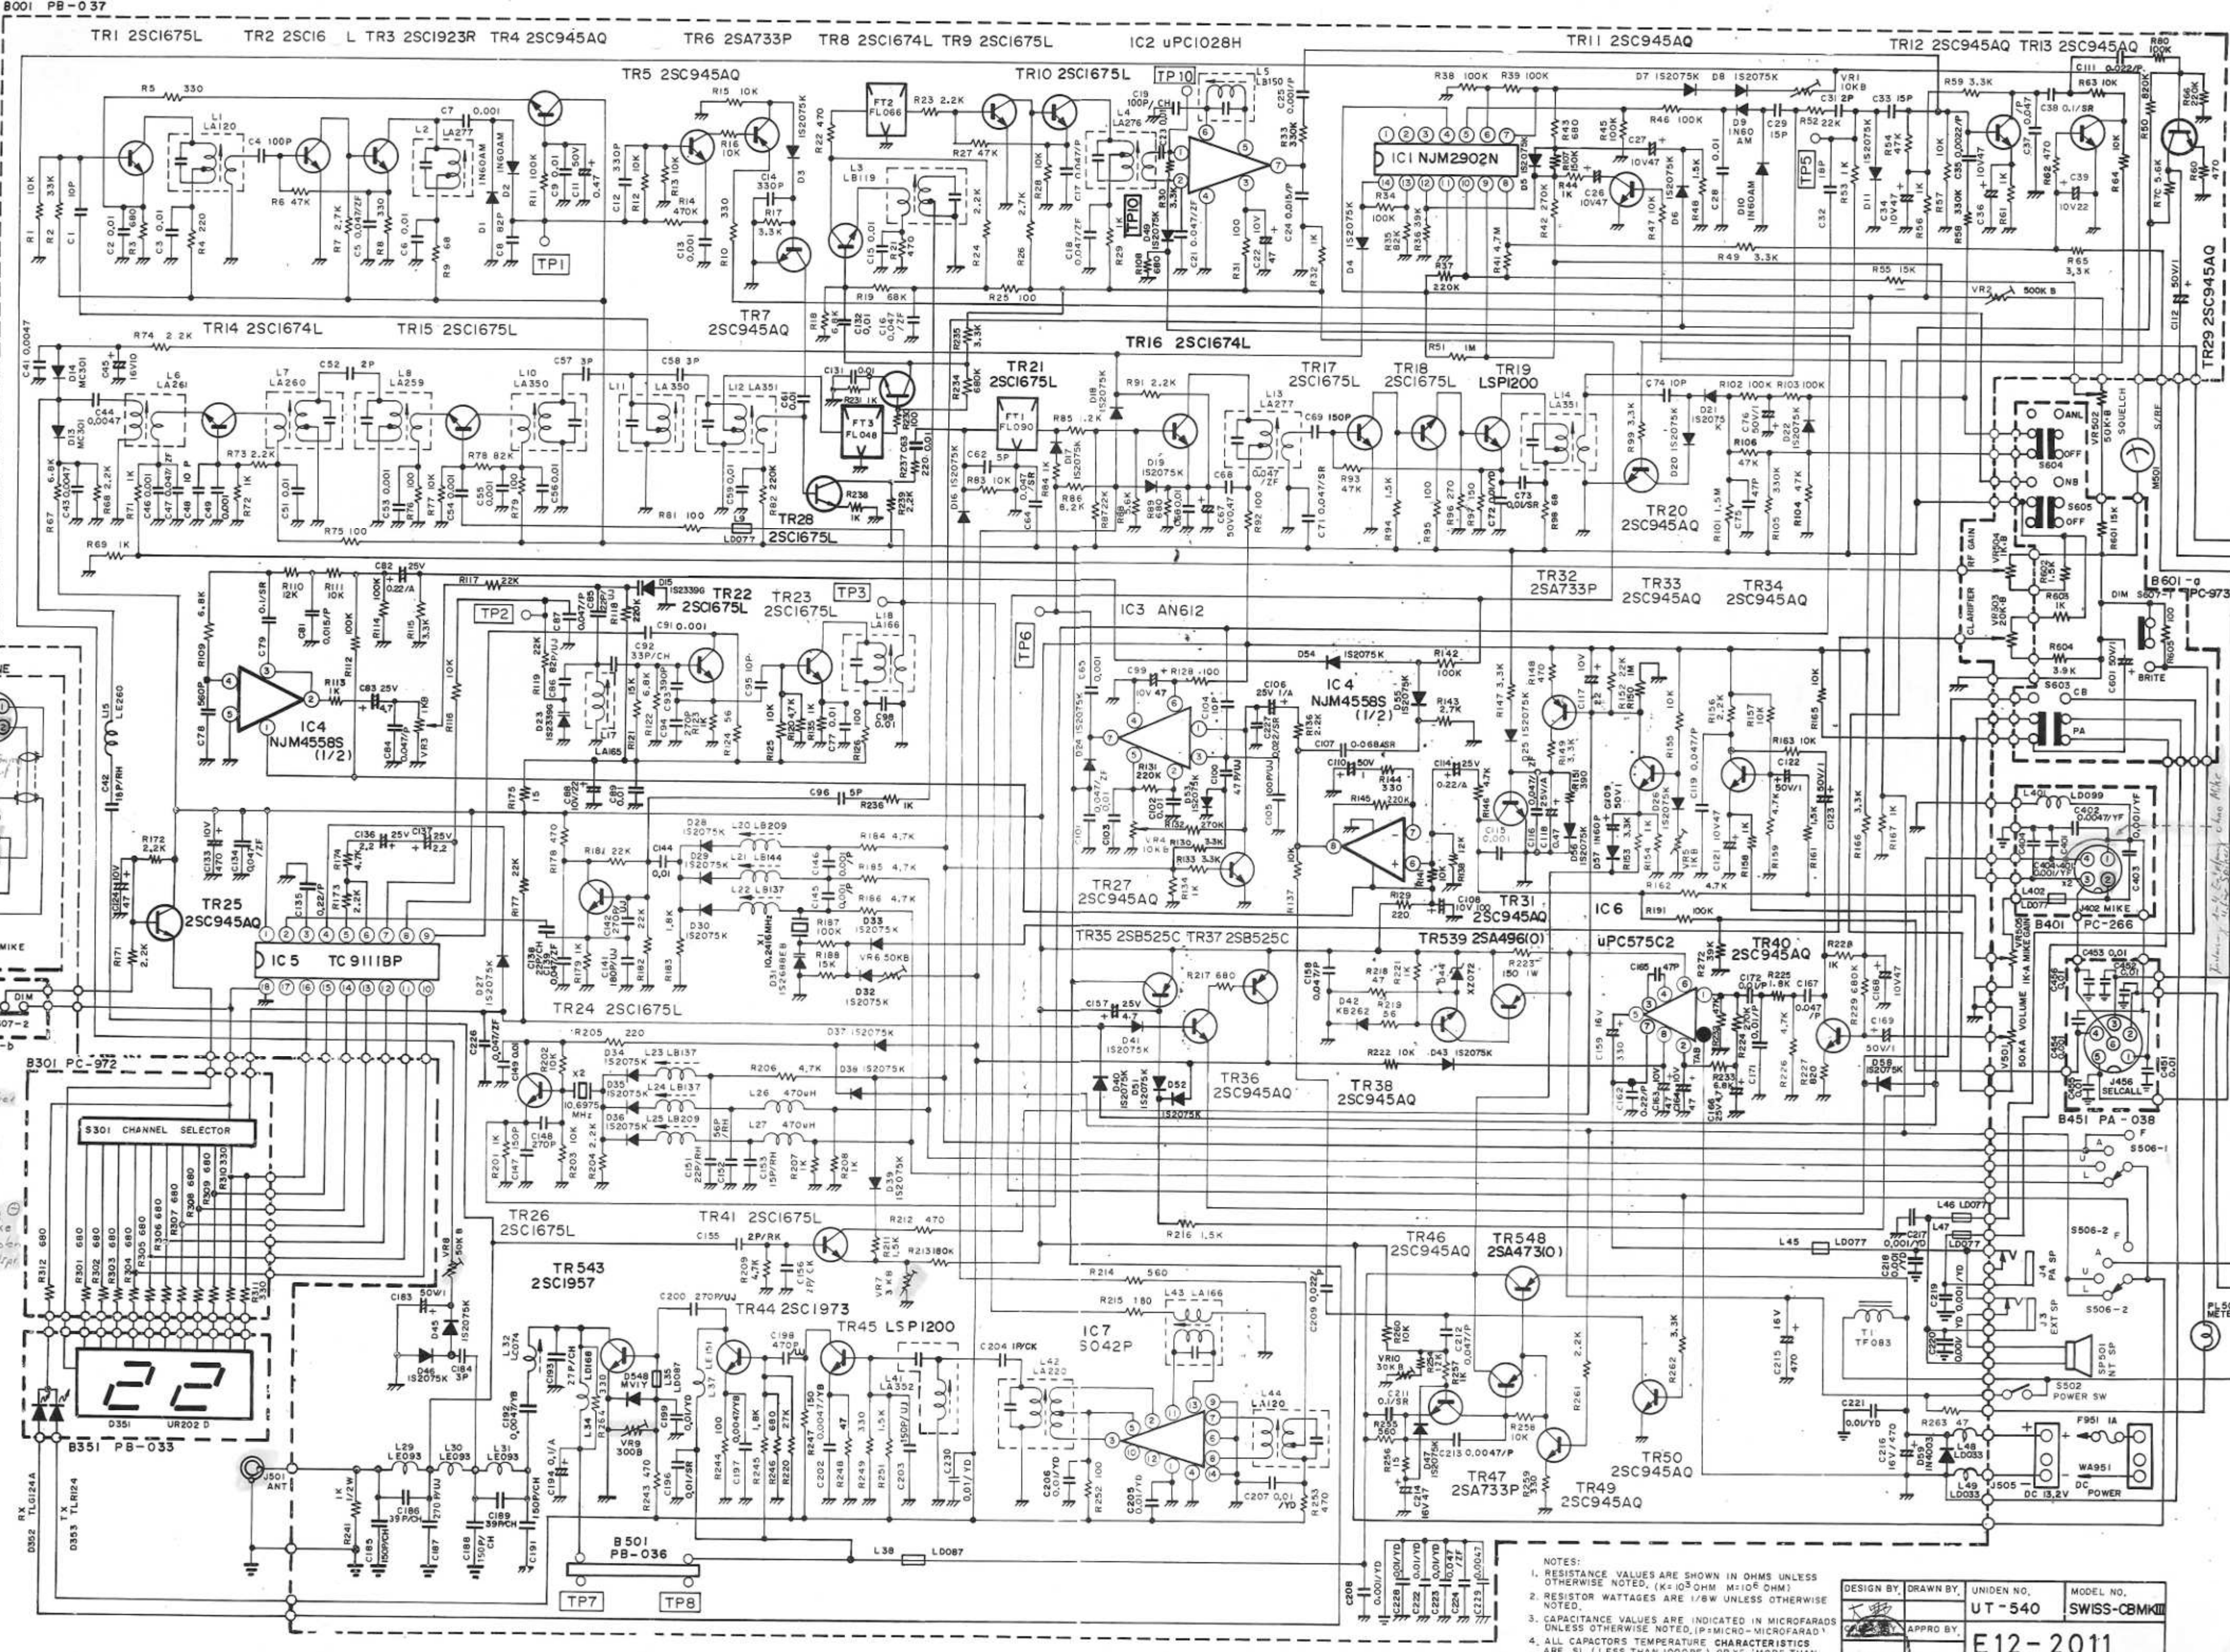


1. Blau-Grün
2. Gelb-Mikro
3. Rot-Sarab
4. Grün

NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=10³ OHM M=10⁶ OHM)
2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED. (P=PICTO-MICROFARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESS THAN 100PPM) OR YF (MORE THAN 100PPM) UNLESS OTHERWISE NOTED.

DESIGN BY:	DRAWN BY:	UNIDEN NO.	MODEL NO.
UT-540	SWISS-CBM		
APPROVED BY:		E12-2011	